

VISCOSITY METER

DC-51

IN PROCESS TO EXCELLENCE

Specifications

Measuring range:

Dynamic Viscosity	Up to 2000 mPa·s (up to 2000 cP)
Temperature	-40... +85°C (-40... +185°F)

Accuracy:

Dynamic Viscosity	±1% of span
Temperature	±0.1°C (±0.2°F) or ±0.2°C (±0.4°F)

Repeatability:

Dynamic Viscosity	±0.5% of span
Temperature	±0.1°C (±0.2°F)

Resolution:

Dynamic Viscosity	0.1 mPa·s (0.1 cP)
Temperature	0.01°C (0.02°F)

Supported measuring units	Dynamic Viscosity: mPa·s, cP Temperature in °C or °F
Temperature compensation	Automatic
Viscosity compensation	Automatic
Maximum Pressure	100 bar (10 MPa)
Process connection	NPT 1/2", 3/4", 1" ANSI 1/2", 1", 2", 3" 4" DN 10, 15, 25, 50, 80, 100
Ambient temperature	-40... +50°C (-40... +122°F)
Weather rating	IP67 for sensor and IP 55 fo Terminal box
Materials:	
Sensor	Stainless steel SS 316 L; NiSpan C; Hastelloy C22;Teflon
Other Wetted Parts	Stainless steel SS316 L or Hastelloy C22
Electronics Housing	Aluminum, blue epoxy finish
Electrical Connections	Screw terminals; Cable entry: 2 x 3/4" NPT
Power supply	6-12 VDC 30 mA (60 mA pick)
Output:	
Sensor	Line viscosity and temperature digital signals
Analog	Up to 3x isolated 4-20 mA, direct or reverse-acting, configurable
Digital	Standard: RS485, Modbus; user choice of signals and protocols
Factory calibration	Calibration certificates supplied as standard
CE mark	Compliant EN 61326 ; EN 5011 ; EN 50082-2
Implosion protection marking	ATEX II 1/2G Ex ia IIB T4; IECEX Ex ia IIB T4 Ga /Gb; CCE

Advantages

- Continuous measurements
- High accuracy
- Simple installation
- Suitable for very viscous liquids
- Wide range of applications
- Safe operation, low maintenance
- Easy cleaning
- Rigorous factory testing
- Compact design
- Automatic viscosity/temperature compensation


Applications

- Petroleum industry
- Ethanol production
- Food & Beverages
- Chemical industry
- Cosmetic industries
- Process monitoring and control

Software

- Receiving of viscosity and temperature values from Terminal Box via cable
- Various formats for data reading
- Storage of the measured and calculated values in the database tables
- Conversion of the database tables to EXCEL format and printing the results
- Up to 16 sensors monitoring (another sensors quantity is optional)

DC-51 S-type

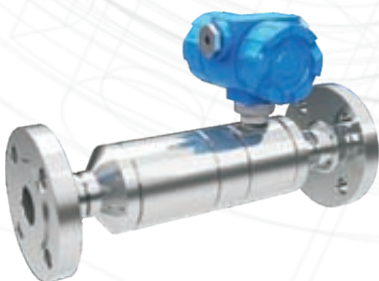

DC-51 G-type



DC-51 T-type



For more information please visit www.lemis-process.com

USA

LEMIS USA, Inc.

15556 Summit Park Dr. Suite 601
Montgomery
TX 77356, USA
Ph.: +1 281 465 8441

EUROPE

AS LEMIS Baltic

26 Ganību dambis
Rīga, LV-1005
Latvia, EU
Ph.: +371 6738 3223
Fax: +371 6738 3270

INDIA

LEMIS India PVT LTD

504, Bhumiraj Costarica, 5th floor
Plot 1&2, Sector 18, Sanpada
Navi Mumbai-400705, INDIA
Ph.: +91 22 6721 5655
Fax: +91 22 6794 2666

E-mail: info@lemis-process.com

